



OBEX™

Milliken

Entrance Flooring

ROLL & MAT

Milliken



OBEX™ Roll

Featuring a durable vinyl backing with multiple colour options, OBEX™ Rolls allow for seamless transitions into hallways and larger spaces. Rolls can be cut to produce runners or installed wall-to-wall, protecting against dirt and moisture in high-traffic areas and heavy commercial use.

OBEX™ Cut | Galaxy



Dark Grey



Grey



Dark Blue



Brown



Red



▶ Z3: Roll / Cut / Galaxy / Grey



OBEX™ Mat

OBEX™ Mats combine protection with flexibility. Whether applied as a primary barrier system or as a temporary, loose-laid option when additional protection is needed, Mats capture fine dirt, larger particles, and moisture.



▶ Z3: Mat / Cut / Galaxy / Brown

OBEX™ Mono



Grey

OBEX™ Cut | Galaxy



Dark Grey




Grey



Dark Blue



Brown



Red

Covering the Zones

Protection from the Outside In

To determine the most effective OBEX™ solution, our team evaluates your building's entry based on three distinct Zones. This process starts at the outside of the building, and addresses the entire pathway through any airlocks, vestibules, and lobby or reception areas. Because every facility is unique, breaking down these Zones helps define where entrance flooring should be installed, as well as what combinations of Forms and Materials will deliver the best protection and performance.

ZONE 1 | OUTDOORS

Location: Outdoor area prior to building's entrance

Recommendation: Product with heavy scraping action

Goal: Trap grit, heavy dirt particles, and moisture, including snow, salt, and sand

ZONE 2 | VESTIBULE / AIRLOCK

Location: Enclosed entrance of building

Recommendation: Dual-action product that combines scraping and absorption


Goal: Collect dirt, debris, and moisture

ZONE 3 | INDOORS

Location: Primary area(s) inside building

Recommendation: Product with high absorption qualities

Goal: Remove remaining moisture and small particles

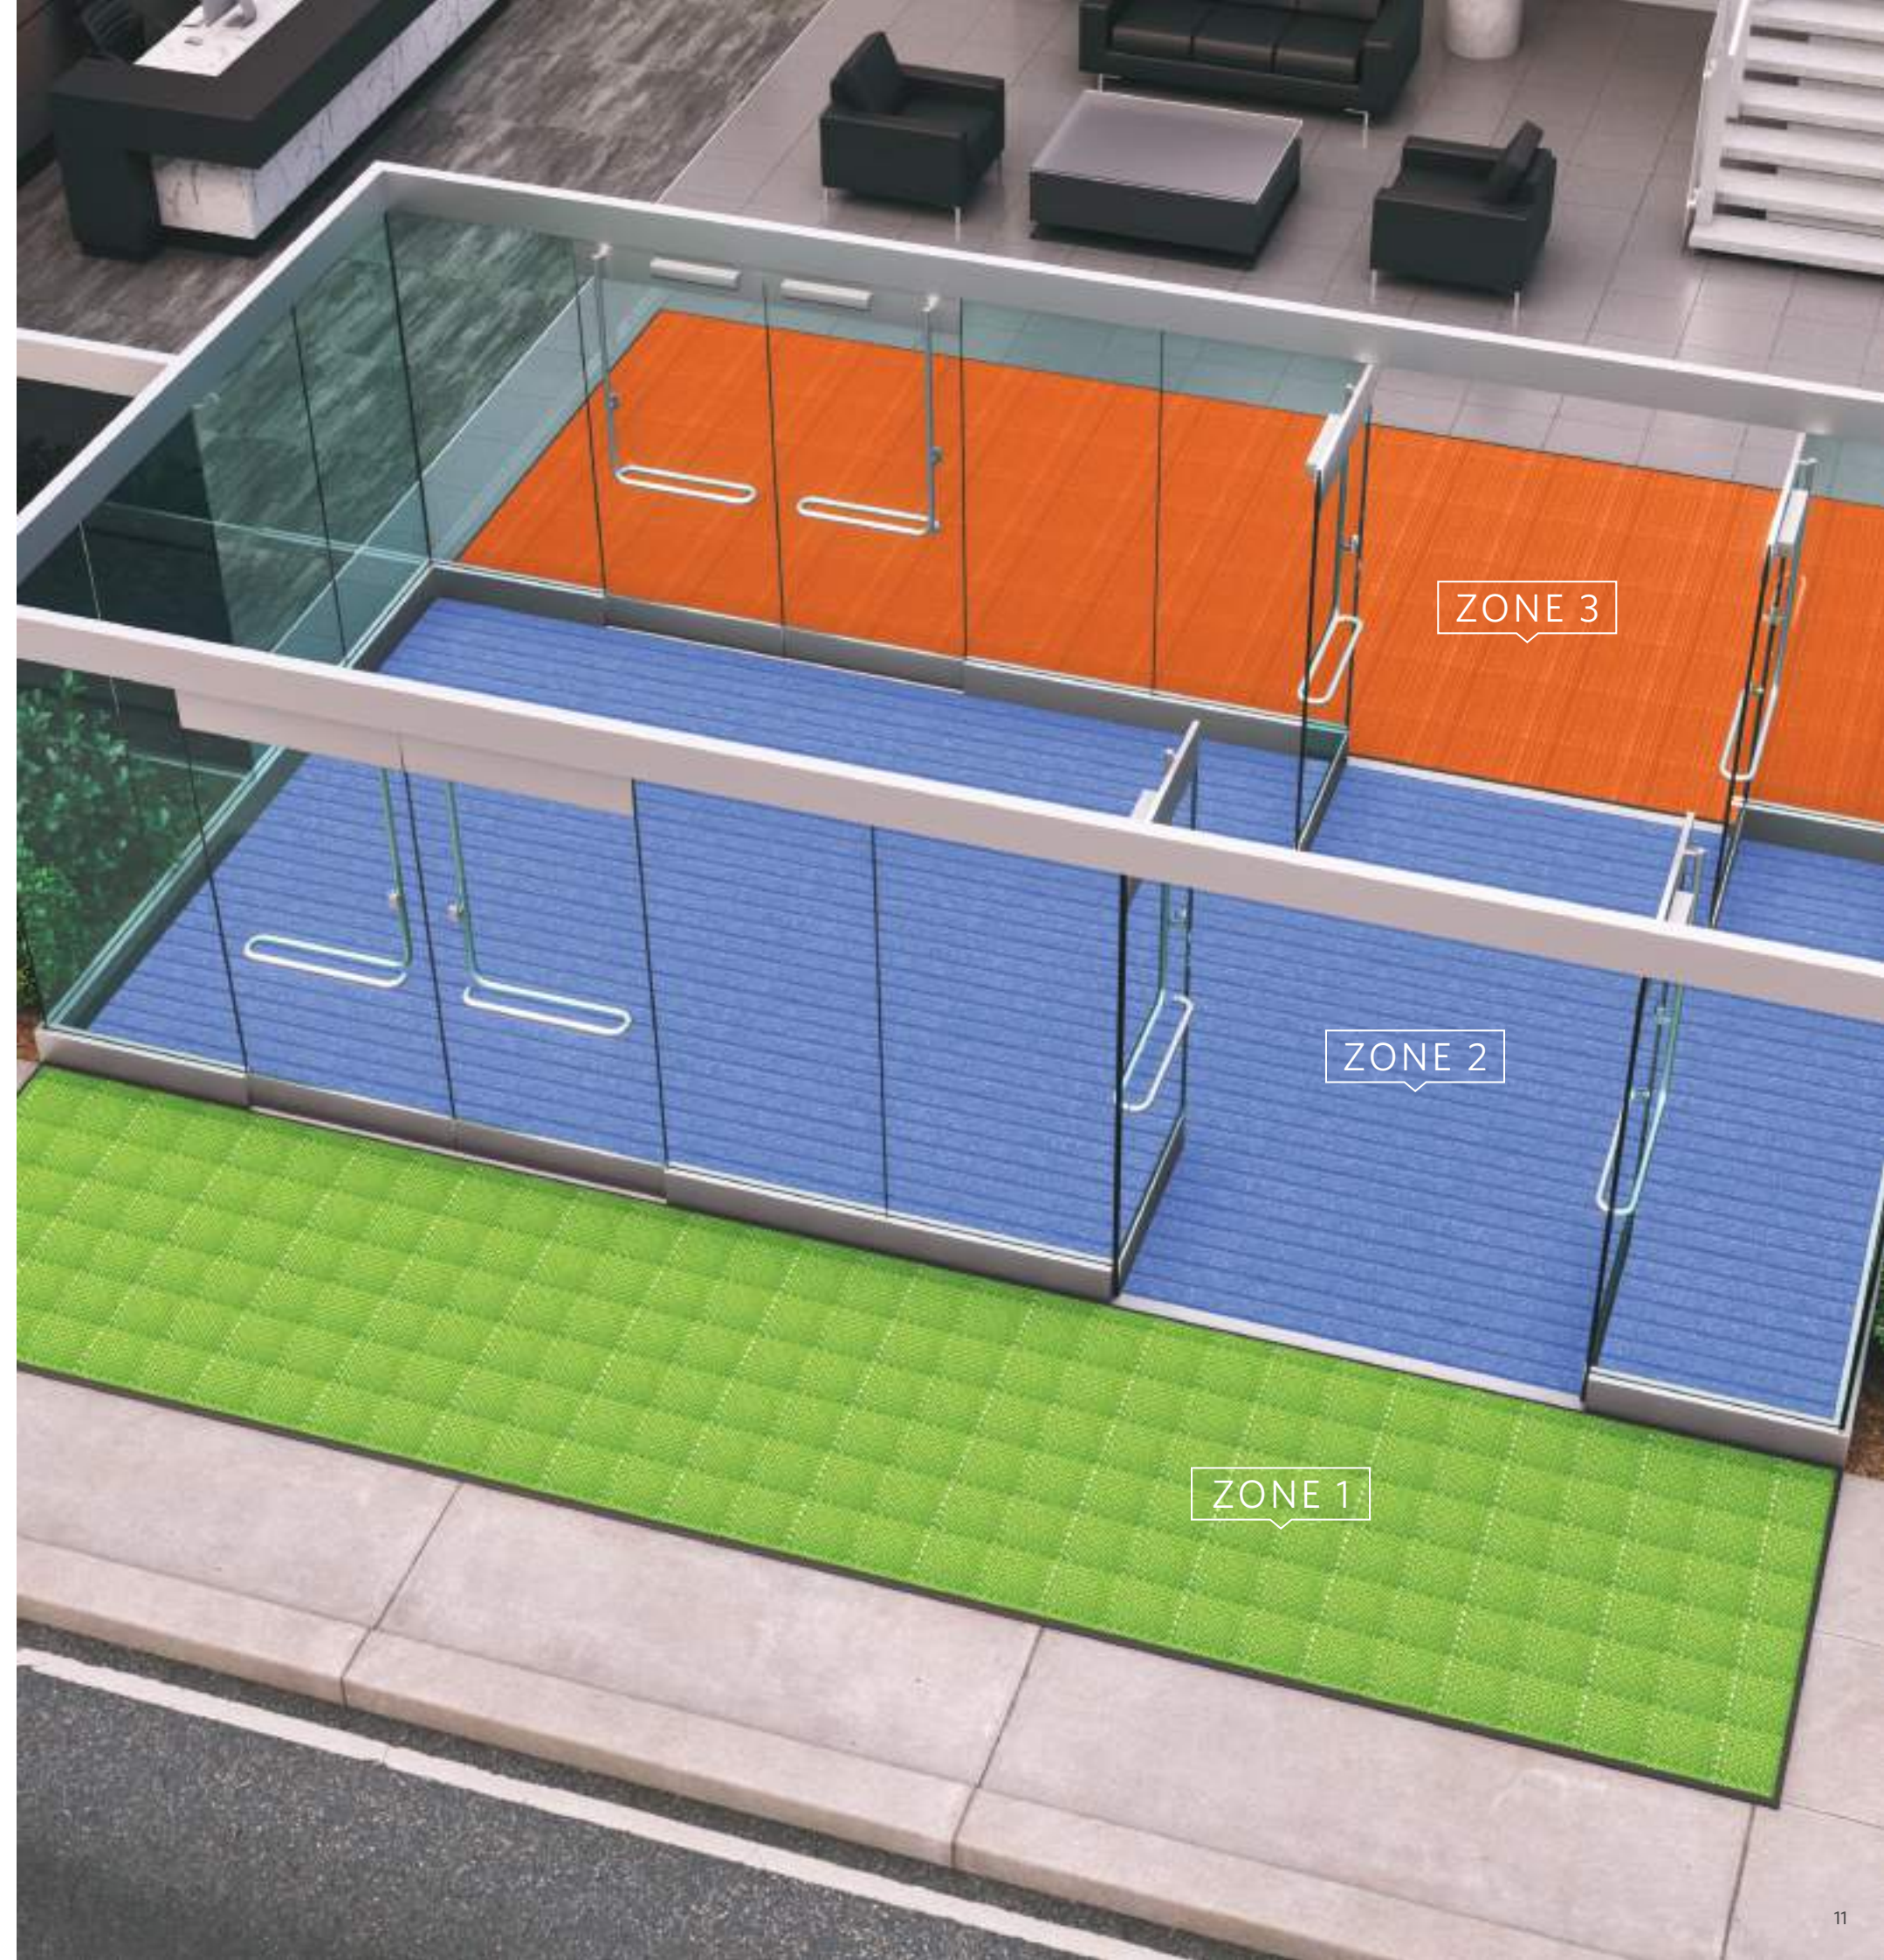



Introducing **OBEX VIA**[™]

Our **Variable Installation Approach (VIA)** means you don't have to settle for generic, one-size-fits-all entrance flooring.

OBEX[™] VIA is our site-specific analysis that starts with an assessment of your facility's unique environment, specific needs, and challenges.

We then match your requirements with our offering of effective Forms and industry-proven Materials.

Finally, VIA focuses the conversation on your preferences, resulting in a tailored entrance flooring system that delivers both performance and protection.

- O** **Objective - What do you need your entry to do?**
Factor in variables such as weather conditions and the intensity of foot, rolled, and heavy cart traffic.
- B** **Barrier Level - Where and to what degree do you need protection?**
Assess each Zone along the entry pathway, including vestibules, lobbies, and transition areas to determine available linear walk-off distance.
- E** **Enhance - What look and style do you want?**
Review options for colour and pattern, as well as coordination with interior flooring products and any identity branding you may want.
- X** **Execute**
Based on your answers to the previous questions, we can now identify and recommend the most effective, customised system of OBEX[™] Forms and Materials.

Mat & Roll Specifications

OBEX™ MONO

Construction
Tufted, Cut Pile

Standard Mat Size

- 85 x 60 cm 85 x 120 cm
- 85 x 150 cm 85 x 200 cm
- 85 x 300 cm 115 x 180 cm
- 115 x 200 cm 115 x 240 cm
- 115 x 300 cm

Textile Yarn Type

100% Econyl® Regenerated BCF Polyamide, Twisted & Heat-Set Monofilaments

OBEX™ CUT

Construction
Tufted, Cut Pile

Standard Roll Size

2 m x 18 m

Standard Mat Size

- 85 x 60 cm 85 x 120 cm
- 85 x 150 cm 85 x 200 cm
- 85 x 300 cm 115 x 180 cm
- 115 x 200 cm 115 x 240 cm
- 115 x 300 cm 150 x 200 cm
- 150 x 250 cm 150 x 300 cm

Textile Yarn Type

100% Econyl® Regenerated BCF Polyamide, Twisted & Heat-Set Multi/Monofilaments Dual Fibres

Quick Reference Guide

Form - Material	Zone Application			Dirt/Debris Removal			Moisture Absorption			Installation Approach		
	Z1	Z2	Z3	Good	Better	Best	Good	Better	Best	Recessed	Surface	Wall to Wall
Bar - Mono 11mm	•	•				•				•	•	•
Bar - Mono 16mm	•	•				•				•		
Bar - Cut 11mm		•				•			•	•	•	•
Bar - Cut 16mm		•				•			•	•		
Half Bar - Mono 11mm	•	•				•				•	•	•
Half Bar - Mono 16mm or 22mm	•	•				•				•		
Half Bar - Cut 11mm		•				•			•	•	•	•
Half Bar - Cut 16mm or 22mm		•				•			•	•		
Grid - Vinyl Open 11mm	•				•					•	•	•
Grid - Vinyl Closed 11mm or 16mm		•			•					•	•	•
Grid - Mono Open 11mm	•					•				•	•	•
Grid - Mono Closed 11mm or 16mm		•				•				•	•	•
Grid - Cut Open 11mm		•				•			•	•	•	•
Grid - Cut Closed 11mm or 16mm		•				•			•	•	•	•
Tile - Cut		•	•		•				•	•	•	•
Tile - CutX		•	•			•		•		•	•	•
Tile - Loop		•	•	•				•		•	•	•
Roll - Cut		•	•		•				•	•	•	•
Mat - Mono	•	•				•					•	
Mat - Cut		•	•		•				•		•	

Milliken's integrated OBEX™ system of Forms and Materials optimises safety, wellness, and design from the outside in.

