

OBEX™ GRID: MONO

16 mm Closed

SPECIFICATION SHEET DATE: 27 AUGUST 2019

MODULAR GRID

Grid Material

100% UV-Resistant PVC

Grid Size

Nominal: 210 mm x 210 mm

Installed Usable: 198 mm x 198 mm

Nominal Grid Thickness

16 mm

Nominal Total Thickness

18 mm Including Textile

Grid Colour

Black

Nominal Total Weight

10,530 g/m²

TEXTILE

Textile Construction

Cut Pile

Textile Yarn Type

Econyl® 100% regenerated polyamide, twisted & heat-set monofilaments

Textile Dye Method

Solution-Dyed

Lightfastness (BS EN ISO 105-B02:2013)

8 (maximum mark)

Fire Classification (EN ISO 13501-2010)

Bfl-s1

Dynamic co. of Friction (EN 138393:2003)

DS

Dimensional Stability (-25°C to 60°C)

+/- 1 %

Static / Dynamic Loading

36 kg/cm²

Rolling Load Weight - Freelaid

2,000 kg

Rolling Load Weight - Glued

4,000 kg

Grids Per Box

30 (1.176 m²)

Recommended Maintenance

Daily Vacuuming and Quarterly Hot Water Extraction

ADA / BS 8300 / ISO 21542 Compliant

ISO Manufacturing Certification

ISO 9001


ISO Environmental Certification

ISO 14001

WARRANTIES

1-Year Manufacturing Defect Warranty

5-Year Wear Warranty

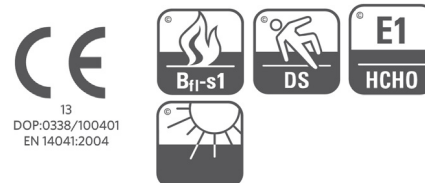

This product is covered by one or more patents, published applications and/or patents pending. Specifications are subject to normal manufacturing tolerances and may be changed without prior notice. Copies of actual test results are available upon request.